

# ACO Self

## Residential Drainage & Landscape Products

HexaLine is a recyclable polypropylene trench drain system with a range of innovative features, making installation easier than ever.

The lightweight, cellular construction allows for a simple 'push-fit' of channels and accessories and makes cleaning and maintenance easy.

The wide selection of grate styles and materials make it simple to match any aesthetic and application requirements.


Suitable for pedestrian/light vehicle traffic applications such as:

- Residential driveways
- Patios
- Walkways
- Basements
- Pools



**HexaLine**

### Product Overview

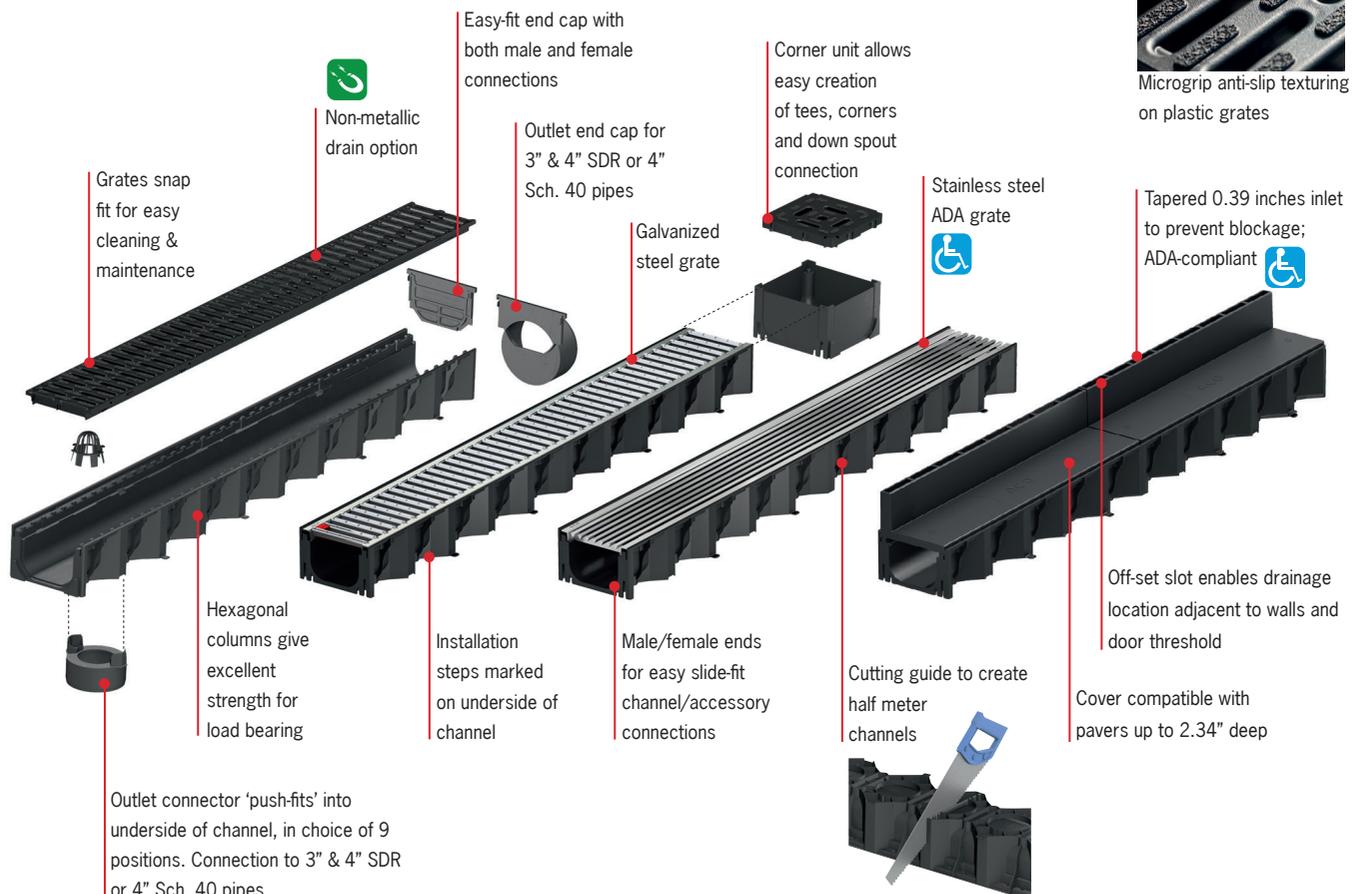

## Part Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
HexaLine channel (1 meter)	<b>319200</b>	39.4	5.1	3.2	1.65
Galvanized steel grate (1 meter)	<b>38516</b>	39.4	5.1		2.64
Stainless steel longitudinal grate (1 meter)	<b>10323</b>	39.4	5.1		6.95
Brickslot plastic grate (0.5 meter)*	<b>319554</b>	19.7	5.1		0.96
Black plastic microgrip grate (1 meter)	<b>319250</b>	39.4	5.1		1.25
Accessory pack - 2 end caps, bottom outlet & leaf guard	<b>19303</b>	-	-	-	0.4
4" outlet cap	<b>319289</b>	-	5.1	3.2	0.1
End cap	<b>319288</b>	-	-	-	0.1
Corner unit	<b>319560</b>	5.1	5.1	3.2	0.4
Garage Pack - black microgrip plastic grates	<b>19305</b>	39.4	5.1	9.6	8.92
Garage Pack - galvanized steel grates	<b>19309</b>	39.4	5.1	9.6	12.9

\* 2 grates needed to fill 1 meter channel.

## 10 ft Garage Pack includes:

- 1 - Accessory pack
- 3 - HexaLine channels (10 ft)

Choose either black plastic microgrip or galvanized steel slotted grates.



## Grate Options



## Accessories

A full range of accessories are available for simple installation.

### Corner unit:

Allows up to 4 way channel connection

### Accessory pack includes:

- 2 - closing end caps
- 1 - bottom outlet
- 1 - leaf guard



## Installation Instructions



Excavate area to accommodate trench drain and 4" concrete surround.



Rough in 3" or 4" SDR pipe or 4" schedule 40 outlet pipe, compact excavation base and lay 4" deep concrete bed.




Knockout channel base for outlet and start to lay channels from outlet position.



Continue to lay channels working away from outlet, channels slide-fit together.



Pour 4" concrete around channel sides allowing for pavement detail (see section drawing above).

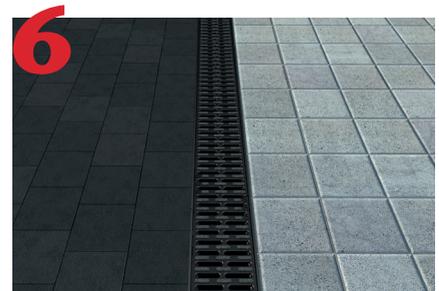

Finish pavement/pavers must be 1/8" higher than the grate.

For pedestrian **only** applications, trench drain can be set directly on well compacted soil. For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

## ACO Systems, Ltd.

1-2880 Brighton Rd.  
Oakville, ON L6H 5S3  
Tel: (905) 829-0665  
Fax: (905) 829-2908

**Electronic Contact**  
info@acocan.ca  
www.acoself.com

## Follow us on

